



GUARDIAN

FIRE EQUIPMENT, INC.
MIAMI, FL

Ph. 800.327.6584 • Fax 800.827.3869

DETAIL AND SUBMITTAL SHEET

6700 Series - Fabricated Manifolds

Project/Location: _____

Date: _____

Architect/Engineer: _____

Contractor: _____

☒ *Appropriate Selection*

Used to conduct flow tests on fire pumps.

Provides means to test a fire pump's flow rate capacity per NFPA 20 and NFPA 25 requirements. The number of outlets is based upon the rated flow capacity of the fire pump. Each individual outlet is capable of flowing a minimum discharge of 250 GPM controlled by a hose valve.

Construction

- Steel, painted red

Inlet Options

- Grooved
- Flanged Class 150 or 300

Outlet

- 2 1/2" female NPT

Three, Four, Five, Six, Eight, and Ten-Way Connections

Model No.	Size	B		Pump Flow (gpm)	Weight (lbs)		
		Groove	Flange		Groove	FLG 150#	FLG 300#
<input type="checkbox"/> 6737-4	4" x 2 1/2", 3-way	8"	8 1/2"	750	11	22	32
<input type="checkbox"/> 6737-6	6" x 2 1/2", 3-way	9 1/2"	10"	750	19	35	55
<input type="checkbox"/> 6747-4	4" x 2 1/2", 4-way	8"	8 1/2"	1000	12	23	33
<input type="checkbox"/> 6747-6	6" x 2 1/2", 4-way	9 1/2"	10"	1000	20	36	56
<input type="checkbox"/> 6747-8	8" x 2 1/2", 4-way	10 3/4"	11 1/4"	1000	29	56	86
<input type="checkbox"/> 6757-6	6" x 2 1/2", 5-way	9 1/2"	10"	1250	21	37	57
<input type="checkbox"/> 6757-8	8" x 2 1/2", 5-way	10 3/4"	11 1/4"	1250	30	57	87
<input type="checkbox"/> 6767-6	6" x 2 1/2", 6-way	9 1/2"	10"	1500	22	38	58
<input type="checkbox"/> 6767-8	8" x 2 1/2", 6-way	10 3/4"	11 1/4"	1500	31	58	88
<input type="checkbox"/> 6768-8	8" x 2 1/2", 8-way	10 3/4"	11 1/4"	2000	33	60	90

Inlet Option


- ☐ -G Grooved
- ☐ -F Flanged, 150 Class
- ☐ -F3 Flanged, 300 Class



6737-6768 Grooved



6737-6768 Flanged

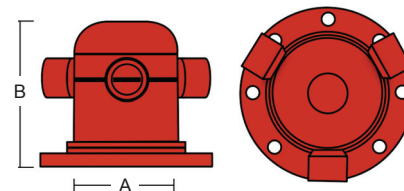

6737-6768